

Zonespot II Midbay emergency light TWS9392WAC



Self-contained Escap Emergency light with 1 h Super Capacitor and Wireless Central Monitoring




220-240V 50/60 Hz AC	1h	IP 43	RAL 9003	850 °C	-O-
CE	AaltoCtrl	LumiTest	Escap	EN 60598-2-22	


Product information	
ID (Product code)	TWS9392WAC
System	Luminaires with 1-hour Escap-supercapacitor and wireless remote monitoring
Mounting	Surface
Mounting option	Pendel
Customs Code	94056180
GTIN Code	6438045019727
ETIM class	Emergency luminaire (EC001957)
Length	180 mm
Width	180 mm
Height	50 mm
Weight	0.9 kg
Colour	RAL9003 (Signal white)
Protection Class	II
IP Class	IP43
Temperature Range Min - Max (°C)	-25...+35
Light Source	LED
Body material	plastic
Electrical Installation	2/3 x 2,5 mm ²
Backup (h)	1 h
Glow Wire Test of Plastic Materials (°C)	850 °C
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Max Input Power VA	3 VA
Luminous Flux (lm)	105 lm

Dimensions [mm]

Zonespot II Midbay emergency light TWS9392WAC

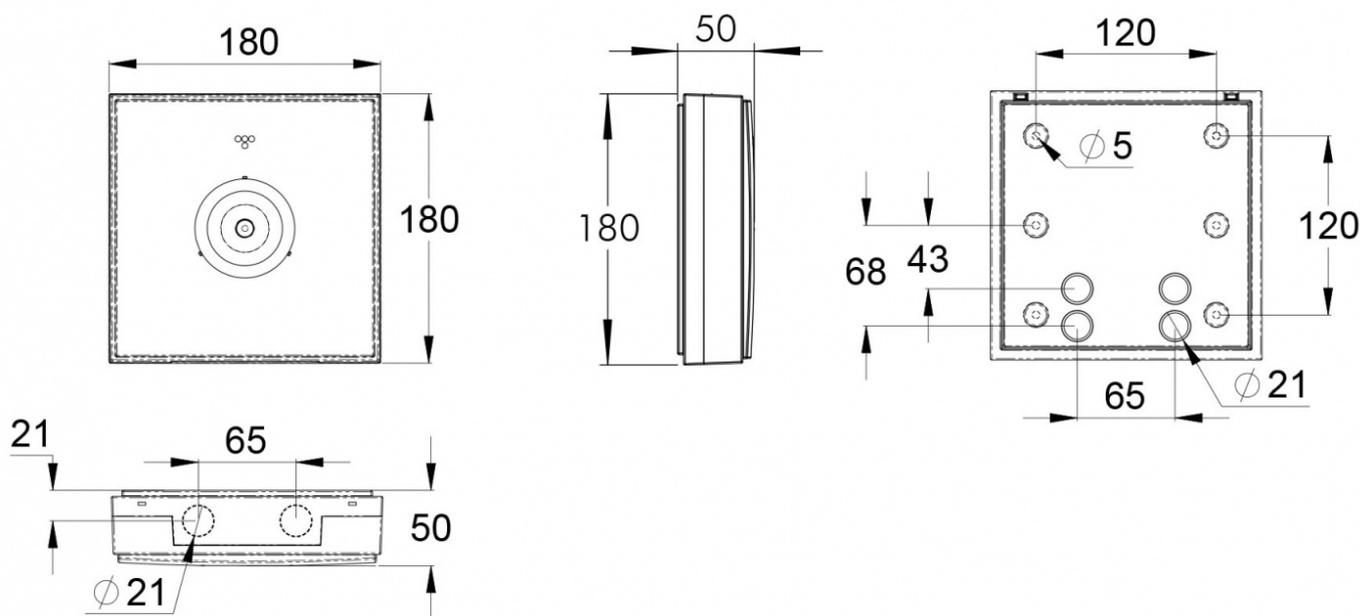

Emergency lighting for open areas (ceiling mounting)

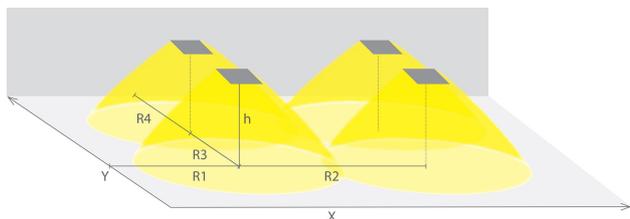


- 0.5 lux table for open areas, in accordance with EN 1838; 0.5-m border zone is taken into account in the table.
- Level of measurement 0.02 m, measurement result in emergency mode

R1 distance from wall, X axis
 R2 mounting distance, X axis
 R3 mounting distance, Y axis

Mounting height (m)	Below the light (lx)	R1 (m)	R2 (m)	R3 (m)	R4 (m)
-	-	0.5 lx	0.5 lx	0.5 lx	0.5 lx
2.5	11	2.5	5	5	2.5
3	7.5	2.5	5	5	2.5
4	4	3	6	6	3
6	2	3.5	8	8	3.5
8	1	3.5	8	8	3.5

Emergency lighting for escape routes (ceiling mounting)

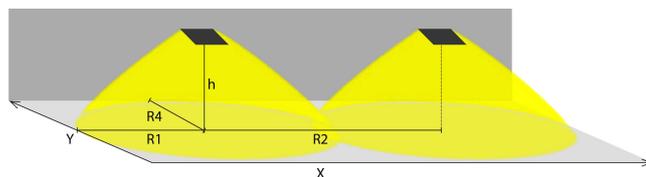

- 1 lux table for the centre line of an escape route, in accordance with EN 1838.
- Level of measurement 0.02 m, measurement results in emergency mode.

R1 distance from wall, X axis
 R2 mounting distance, X axis
 R4 distance from wall, Y axis

Mounting height (m)	Below the light (lx)	R1 (m)	R2 (m)	R4 (m)
-	-	1 lx	1 lx	1 lx
2.5	11	2	5.5	1
3	7.5	2	5.5	1
4	4	3	6	1
6	2	3	8.5	1